

*clear ahead*

*DIMENSION-POLYANT*

*... the true sailcloth producer*

**FLEX<sup>®</sup> Aramid**




**Flex<sup>®</sup> Aramid**

DIMENSION-POLYANT's FLEX<sup>®</sup> line stands for "Fill Laminate Extra X". The FLEX<sup>®</sup> range of fabrics is suited to racing and cruising sails. Foundations of all FLEX<sup>®</sup> laminate constructions are strong fill and warp yarns. Additional 20° and 30° "Double X" patterns from the fill absorb multiple load situations. Thanks to its novel construction, FLEX<sup>®</sup> handles strain in six different directions, resulting in unprecedented shape retention characteristics. In addition to primary loads, off-angle loads in clew, head and tack areas, mid leech and luff are catered for. FLEX<sup>®</sup> will also absorb those dynamic loads that occur during sailing and enables excellent shape control. FLEX<sup>®</sup> styles are crosscut fabrics and available with several fibre densities which can be combined in a sail in accordance with the expected load situation. FLEX<sup>®</sup>'s firmly locked-up fiber matrix guarantees long performance life and superior durability.






**Flex<sup>®</sup> Aramid**

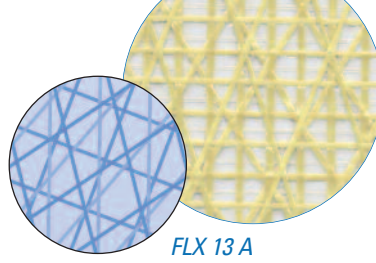

FLX 13 A





**sailcloth  
technology**

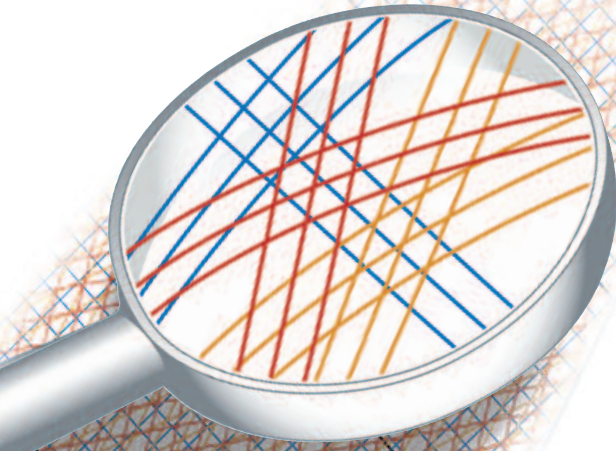

**FLEX<sup>®</sup> - excellent  
shape control**

- Multi-directional load handling – 0° Warp/90° Fill, double 20° yarns, and double 30° yarns means FLEX<sup>®</sup> handles load in six directions
- Maximum draft position – Multi-directional yarn layout addresses stability in draft position
- Leech stability – FLEX<sup>®</sup>'s double 'X's handle mid-leech loads of high- and low-aspect mains and genoas
- Step-up construction – Progressive weights in each FLEX<sup>®</sup> line allow step-up construction
- Tear strength – Strong, durable fill and warp yarns make FLEX<sup>®</sup> a tough, durable material
- Sail weight reduction – FLEX<sup>®</sup> has the ability to split weights from high-load to low-load areas
- Ease of construction – FLEX<sup>®</sup>'s two extra 'X's means there's no need to flip-flop panels

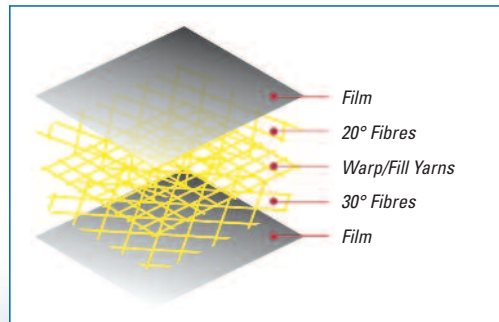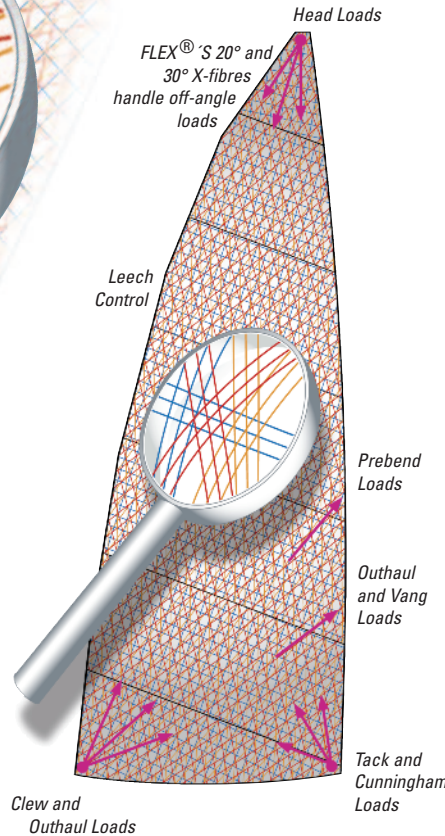

**DIMENSION-POLYANT GmbH, Germany**

**Headquarters**

Speefeld 7  
D-47906 Kempen  
Phone: +49 (2152) 891 0  
Fax: +49 (2152) 891 149  
info@dimension-polyant.com

**DIMENSION-POLYANT SAS, France**

1, Rue Newton  
Parc Technologique  
F-17000 La Rochelle  
Phone: +33 (0) 546 282 201  
Fax: +33 (0) 546 412 840  
larochelle@dimension-polyant.com

**DIMENSION-POLYANT SAS, France**

Port de la Pointe Rouge  
Lot 12 Bis  
F-13008 Marseille  
Phone: +33 (0) 491 736 628  
Fax: +33 (0) 491 722 505  
marseille@dimension-polyant.com

**DIMENSION-POLYANT UK Ltd., United Kingdom**

Unit 11, Kingdom Close  
Kingdom Business Park  
Segensworth East  
GB-Fareham Hampshire PO15 5TJ  
Phone: +44 (1489) 570 551  
Fax: +44 (1489) 570 451  
uk@dimension-polyant.com

**DIMENSION-POLYANT Inc., USA**

78, Highland Drive  
USA-Putnam CT 06260  
Phone: +1 (860) 928 8300  
Fax: +1 (860) 928 8330  
info@us.dimension-polyant.com

**DIMENSION-POLYANT Sailcloth PTY Ltd., Australia**

P.O. Box 825  
Unit 7/9 Powells Rd.  
AUS-Brookvale N.S.W. 2100  
Phone: +61 (2) 9905 9565  
Fax: +61 (2) 9905 9569  
dp-aus@dimension-polyant.com

Style	Warp/Fill	30° X-Fibres	20° X-Fibres
FLX 08 A	4 x 4 1,000 x 1,000 Aramid	3 x 3 1,500 Aramid	
FLX 13 A	4 x 4 1,000 x 1,000 Aramid	3 x 3 1,500 Aramid	2 x 2 1,500 Aramid
FLX 16 A	5 x 6 1,000 x 1,000 Aramid	3 x 3 1,500 Aramid	2 x 2 1,500 Aramid
FLX 19 A	7 x 7 1,000 x 1,000 Aramid	3 x 3 1,500 Aramid	2 x 2 1,500 Aramid
FLX 24 A	6 x 7 1,000 x 1,500 Aramid	3 x 3 1,500 Aramid	2 x 2 1,500 Aramid

FLX13 A- FLX 24 A single taffetta UV  
double taffetta UV

**DIMENSION-POLYANT.COM**